



safety products

Heavy Duty - High Power ELCIs 30A

Heavy Duty - High Power ELCIs - 30A

Configured for both in-line and bulk head mount. Engineered to trip within 25 milliseconds. Protects:

- ▶ Motors
- ▶ Pumping Systems
- ▶ Pressure Washers
- ▶ Manufacturing Equipment
- ▶ Welders
- ▶ Hoists

Has 2' of cable on both line and load side. Will remain reset on power restoration following disruption of primary power.

FEATURES

24140 002-1 ELCI

- ▶ Volts/Amps: 240V/30A
- ▶ Cord Gauge: 10/4 AWG
- ▶ Trip Level: 10 mA
- ▶ Single Phase

24500 006-1 ELCI


- ▶ Volts/Amps: 208-240V/30A
- ▶ Cord Gauge: 10/4 AWG
- ▶ Trip Level: 10 mA
- ▶ Three Phase

TECHNICAL DATA

Response time for ground fault	25mS - typical
Frequency	50 / 60 Hz
Endurance	3,000 operations minimum
Overload Current	six times rated current
Operating temperature range	-20°C to +40°C
Insulation voltage	1500 VRMS - 1 Min.
Power On indication	lighted indicator
Drop out voltage	60% rated voltage - typical
Reset type	auto
Connection type	flying leads
Enclosure	NEMA 4 polymer



24140 002-1

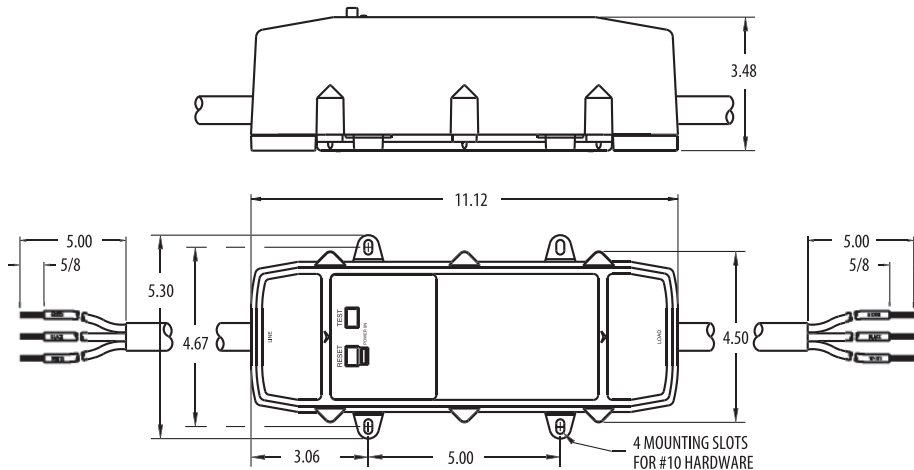

Coleman Cable Inc.

800.323.9355 • www.colemancable.com