




**GFCI Outlet Tester**

Designed to check the integrity of the wiring for ground fault and standard outlets. Tests for proper function of GFCI outlets. Features Power Quality Monitor and Nuisance Trip Test.

**FEATURES**

**30090 012-6** ⓘ

- ▶ Volts/Amps: 120V/15A
- ▶ Wiring Diagnostics - Checks Line Neutral and Ground Wire Integrity
- ▶ GFCI Tester - Inspects for proper operation and nuisance tripping. Separate tests for a 6mA ground fault and a 3mA ground fault
- ▶ Power Quality Monitor (PQM) - Identifies excessive voltage drop (approx. 6V) on the branch circuit by measuring the voltage between neutral and ground

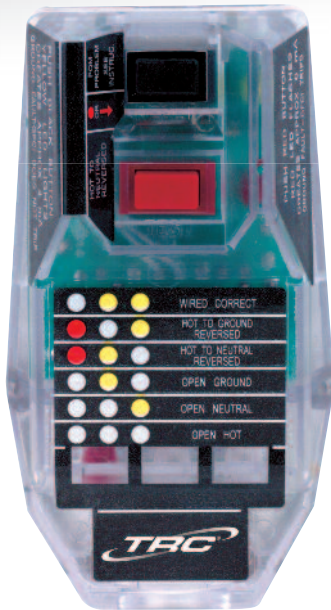

30090 012-6

|   |   |   |                         |
|---|---|---|-------------------------|
| ○ | Y | Y | Wired Correctly         |
| R | ○ | Y | Hot To Ground Reversed  |
| R | Y | ○ | Hot To Neutral Reversed |
| ○ | Y | ○ | Open Ground             |
| ○ | ○ | Y | Open Neutral            |
| ○ | ○ | ○ | Open Hot                |

